



RAISE THE ROOF

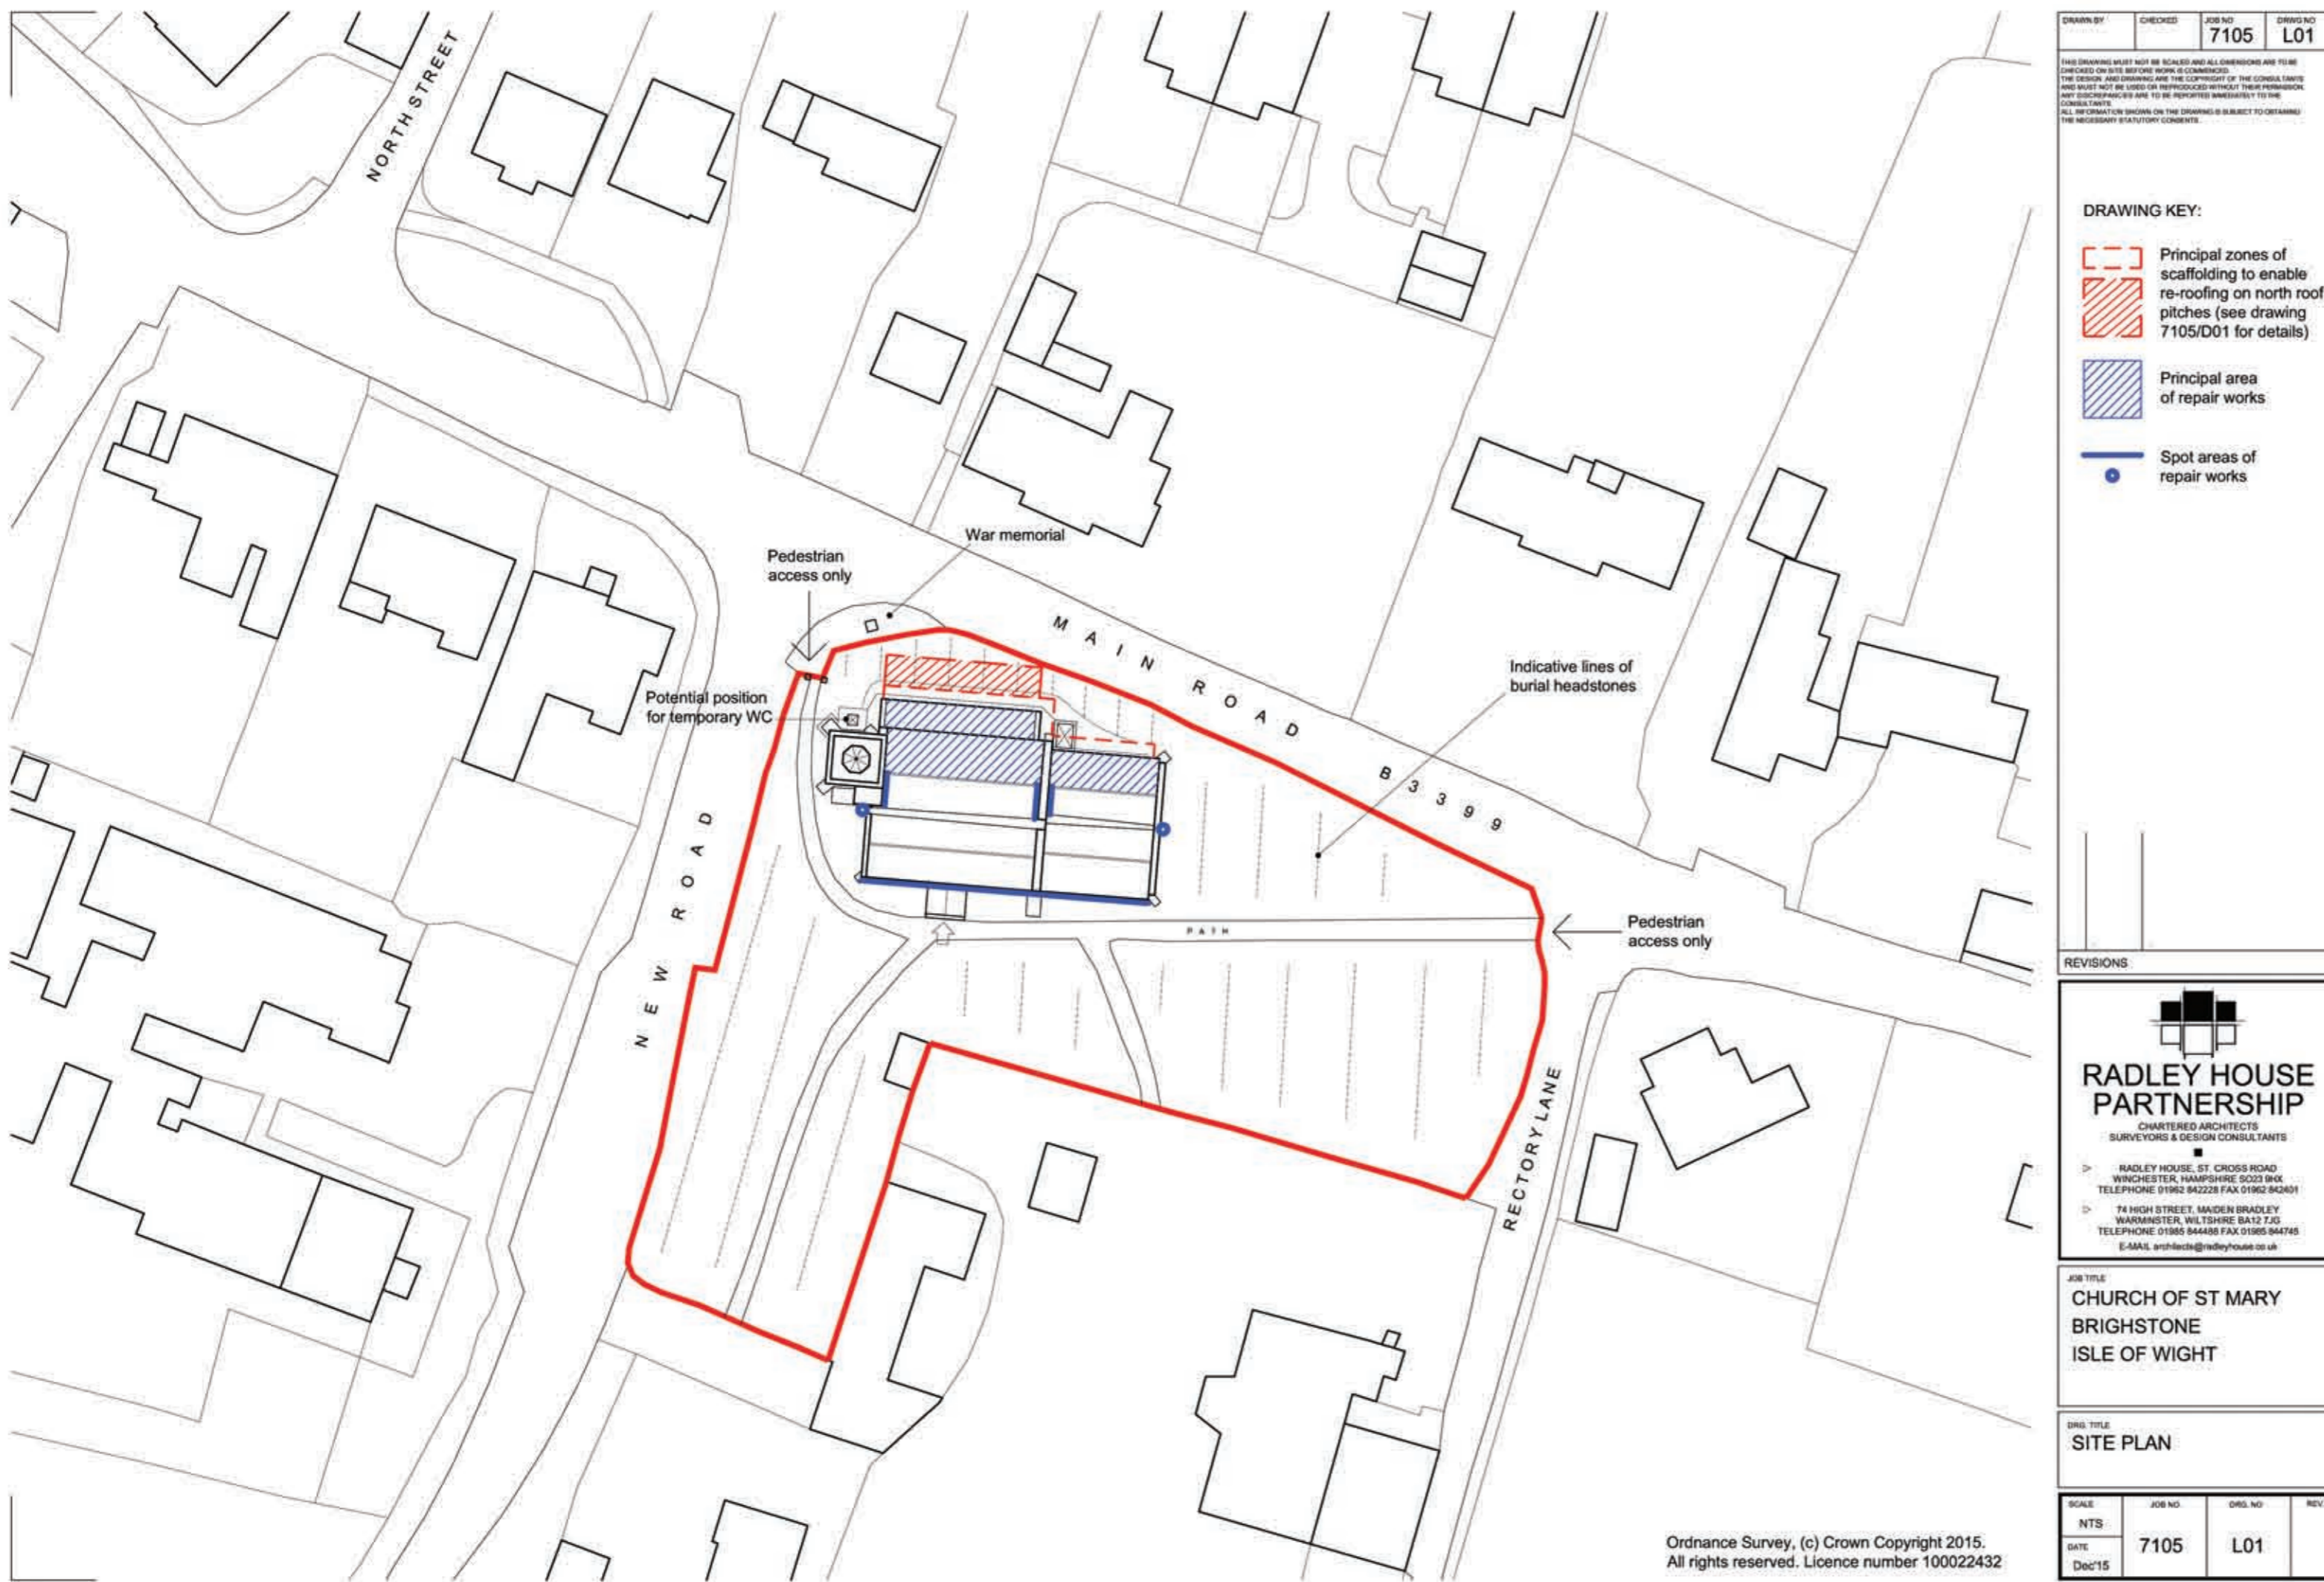

What's the plan then.....

- ◆ A safe public access route will be maintained through the church yard and the church will remain open throughout the works.
- ◆ Scaffold will be erected on the northside of the church, working hours will be limited to between 7.30am to 5.30pm Monday - Friday.
- ◆ A temporary screen will be erected inside to enclose the North Aisle while the works are carried out.
- ◆ Burial headstones will be protected while the work is carried out.
- ◆ A temporary contractors WC and site works area will be fenced off in the churchyard.
- ◆ Listed Places of Worship Roof Repair Fund decision date is 28th June 2016, works would be started within 6 months of any grant offer.

Site plan St. Mary the Virgin, Brighstone

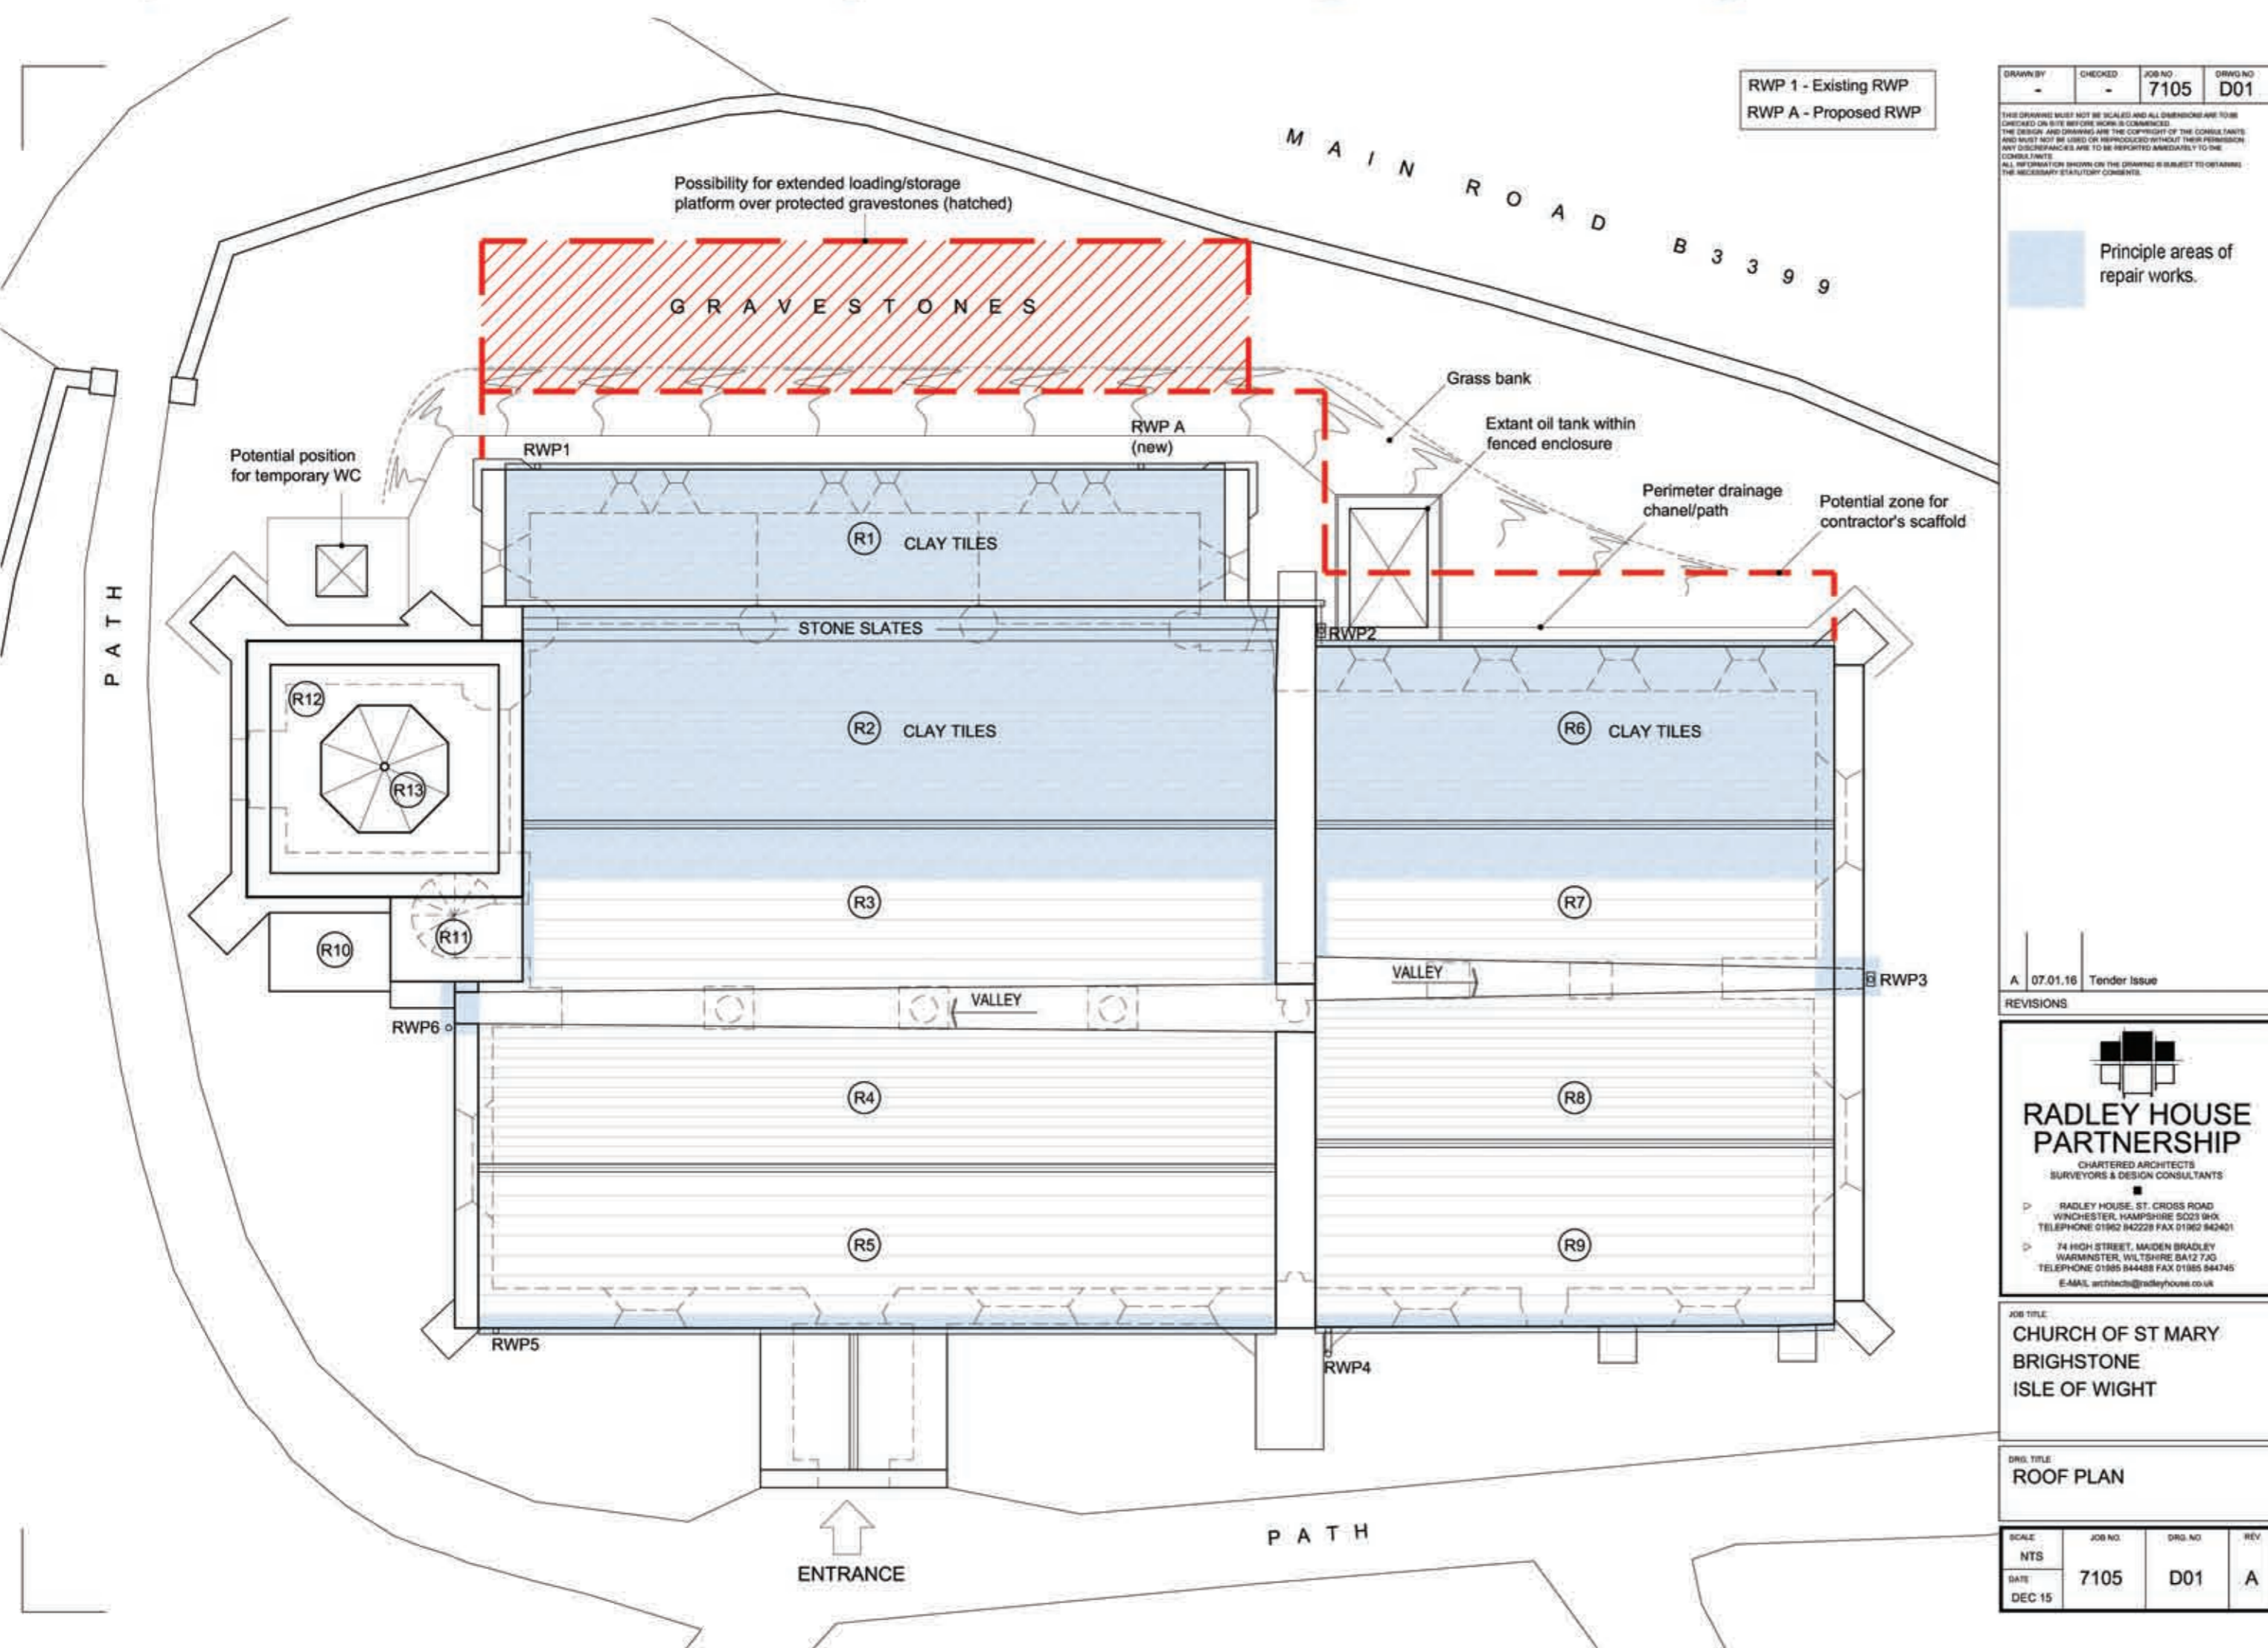

The estimated extent of works.....

- ◆ R1 - North Aisle roof, upto 100% of tiles replaced, lift and relay parapet coping stones on lead dpc. Replace undersized cast iron gutter and provide new down pipe RWPA.
- ◆ R2 - North Nave roof, upto 50% of tiles replaced, up to 75% of ridge tiles replaced. Lift and relay stone eaves tiles. Overhaul cast iron gutter and downpipe RWP2.
- ◆ R3 - South Nave roof, relay top four rows to allow ridge to be relaid.
- ◆ R4,R5,R8,R9 - other roof areas, spot repairs to defective or broken tiles here and there. Overhaul gutters and downpipes replace where undersized.
- ◆ R6 - North Chancel roof upto 50% of tiles replaced, undersized cast iron gutter replaced.

Roof Repair Works estimated at **£86,249**

PLEASE SUPPORT ST. MARY'S RAISE THE ROOF FUND